

# PAPERS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.



[Learn More](#)

**NICELY**


[sales@nicely.com.tw](mailto:sales@nicely.com.tw) / [+886-3-3249020](tel:+886-3-3249020) / [www.nicely-slitte.com](http://www.nicely-slitte.com)

# EG-1 series

## Single Surface Winding Slitter Rewinder

### APPLICATIONS

- Coated and uncoated papers
- Coated and uncoated films
- Thermal lamination films
- Spunbond, Meltblown, Air-through nonwovens
- Leather

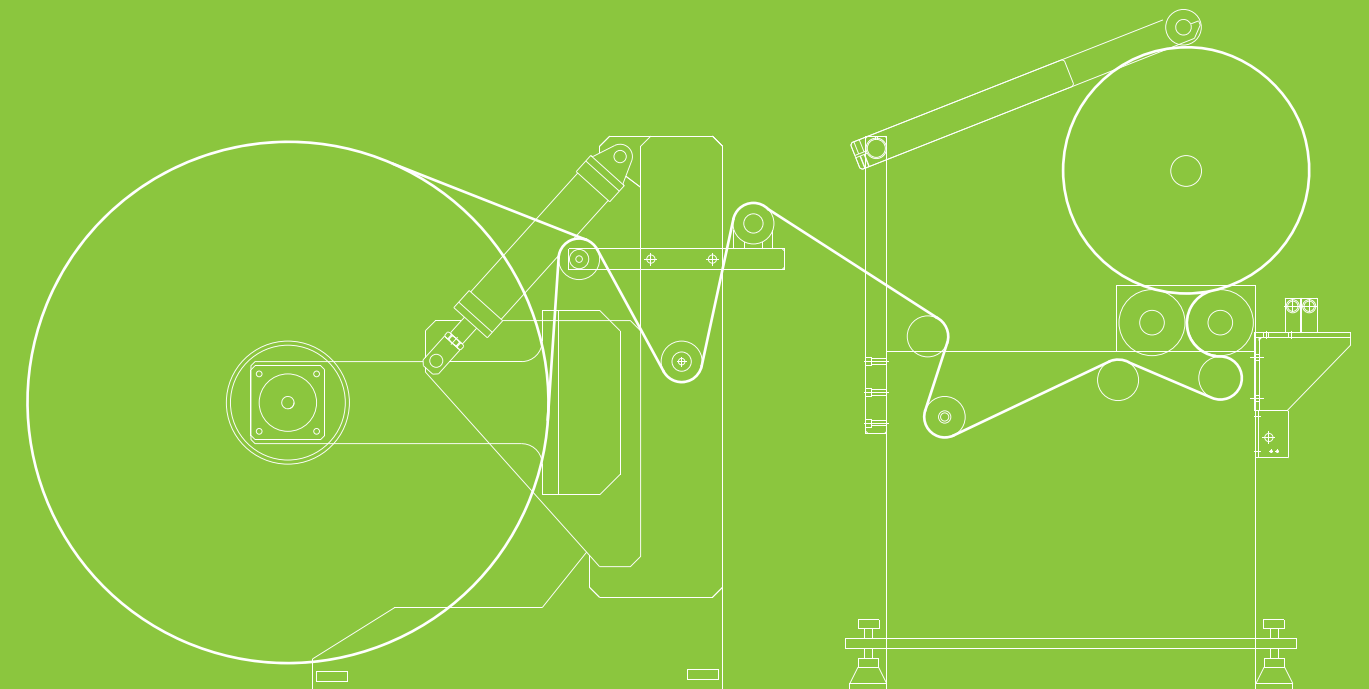

NICELY MACHINERY DEVELOPMENT CO., LTD





# EG-1 series

## SINGLE SURFACE WINDING SLITTER REWINDER

EG-1 series, single shaft surface winding slitter rewinder is an economical solution for handling small diameter rolls. The unwind stand can be equipped with either a shafted or shaftless system, depending on the width of the raw material.

By incorporating an effective spreader roller, the finished reels can mitigate interlayering issues caused by poor material properties. During the rewinding process, the top rider roller ensures proper tension and roll alignment for high-quality finished products. We also offer an optional standalone roll handling device upon request.



### Standard Features

- Shafted unwind stand
- Auto tension control
- Edge guiding system
- Shear or razor slitting
- Trim waste air blower
- Top rider roll

### PAPERS / NONWOVENS

### Optional Features

- Shaftless unwind stand
- Pneumatic cutter
- Static eliminator
- Pneumatic top rider roller
- Unloading device
- PLC control system with HMI touch screen
- Overhead crane



### General Specifications

Roller width	600 – 2700 mm
Unwind diameter	1000 / 1200 / 1500 mm
Min. slit width	20 mm, and up
Max. rewind diameter	450 / 600 / 1200 mm
Machine speed	200 / 300 M/min

Other specification is offered at request.

