

# PAPERS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.



[Learn More](#)

**NICELY**


[sales@nicely.com.tw](mailto:sales@nicely.com.tw) / [+886-3-3249020](tel:+886-3-3249020) / [www.nicely-slitter.com](http://www.nicely-slitter.com)

# EG-4 series

Single Shaft Center Winding Slitter Rewinder

## APPLICATIONS

- Corrugated paper
- Coated / uncoated paper, board
- Labelstock
- Fiberglass mesh
- PE foam tape
- Paper & aluminum lamination
- PVC lamination

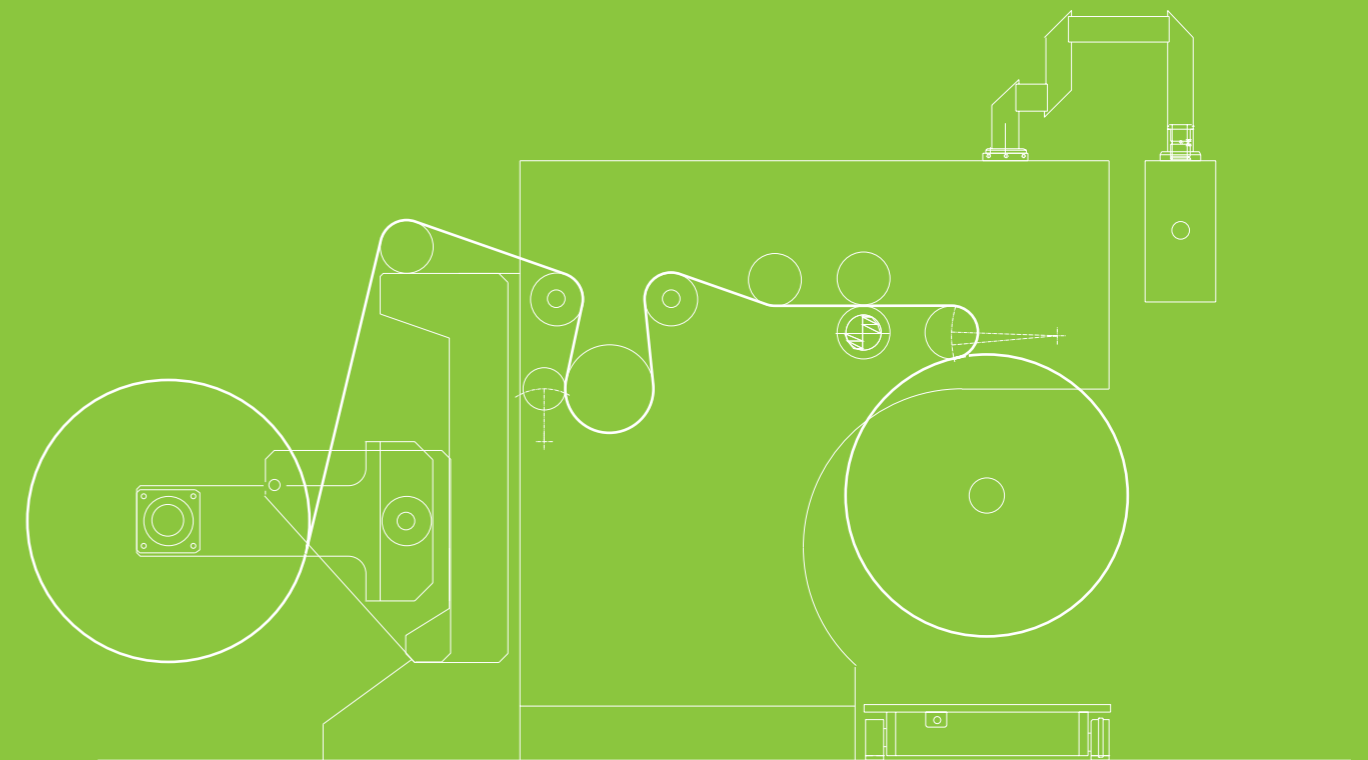

NICELY MACHINERY DEVELOPMENT CO., LTD



# EG-4 series

## SINGLE SHAFT CENTER WINDING SLITTER REWINDER

EG-4 series is a highly efficient center winding slitter rewinder that incorporates advanced technology for optimal performance. With its center winding capability, this machine is designed to handle a wide range of materials that require larger roll diameters, including label stock and various lightweight sensitive films to heavy paper laminates.

One of the standout features of the EG-4 series is that as the roll diameter increases during the rewinding process, the winding position shifts accordingly. This dynamic adjustment ensures consistent tension control throughout the entire winding process, resulting in superior roll density and impeccable winding quality.




### Standard Features

- Cantilevered center winding
- Shaftless unwind stand
- Auto tension control
- Circular shear slitting
- Trim waste air blower
- Contact pressure roller
- Finished roll trolley
- PLC control system incorporated with HMI touch screen

## PAPERS

### Optional Features

- Overhead web flow
- Splice table
- Pneumatic cutter set
- Auto. knife positioning
- Trim suction blower with crusher
- Built-in or independent trim winder
- Laser-assisted core positioner
- Differential rewind shaft
- Motorized unloading trolley
- Enhanced fencing & safety implements

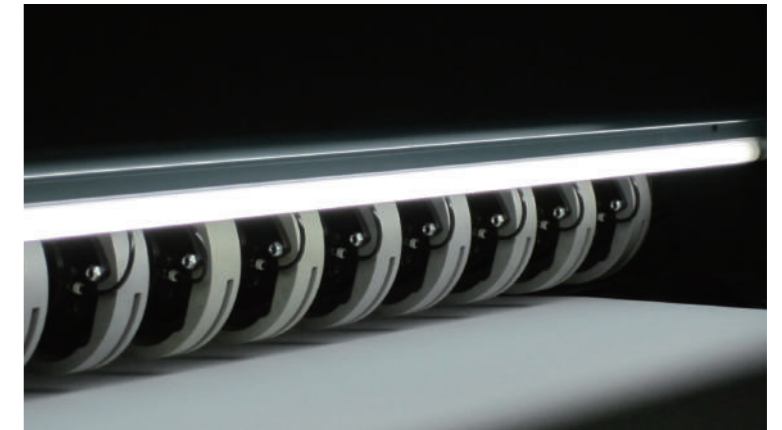

### General Specifications

Roller width	800 – 1800 mm
Unwind diameter	1200 / 1500 mm
Min. slit width	20 mm, and up
Max. rewind diameter	1200 mm
Machine speed	400 / 600 M/min

Other specification is offered at request.

