


PAPERS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.



[Learn More](#)

NICELY


sales@nicely.com.tw / [+886-3-3249020](tel:+886-3-3249020) / www.nicely-slitter.com

EG-2 series

Duplex Shaft Surface Winding Slitter Rewinder

APPLICATIONS

- Kraft paper
- Paper board
- Plain / 100% Recycled paper
- Corrugated paper
- PE coated Paper
- Clay coated board
- Nonwovens
- Aluminum foil

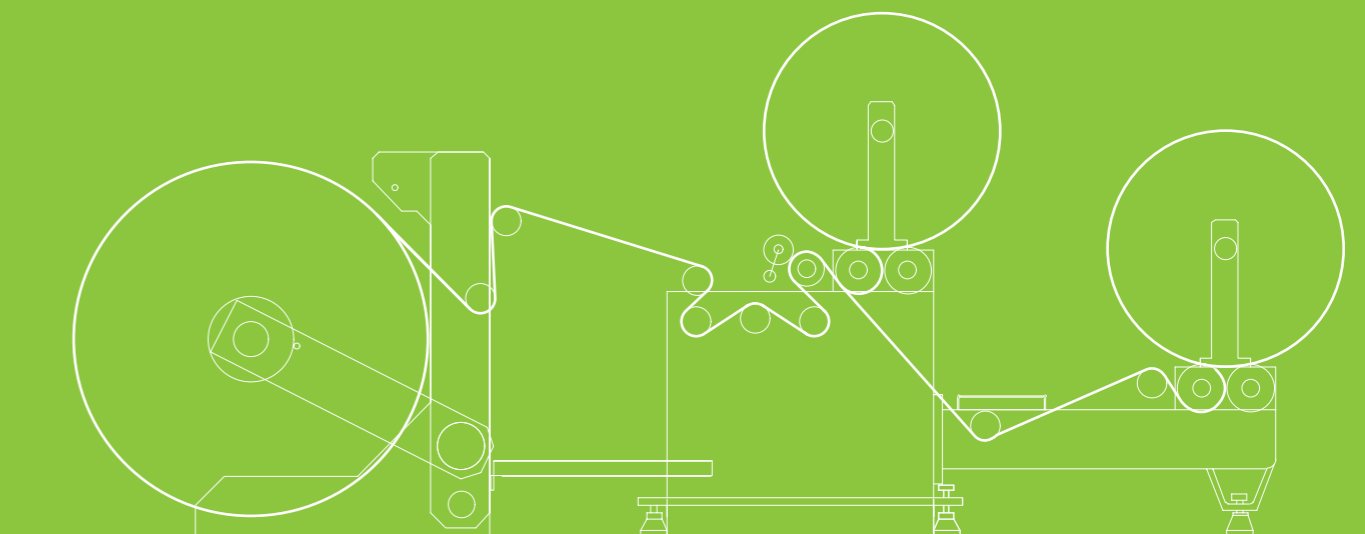


NICELY MACHINERY DEVELOPMENT CO., LTD



EG-2 series

DUPLEX SHAFT SURFACE WINDING SLITTER REWINDER

EG-2 series, dual shaft surface slitter rewinders, offer an affordable solution for various paper, board, and compound materials with varying thickness. These models feature an exceptional design that guarantees precise cutting and smooth separation of reels. The separation capability is especially advantageous when working with thinner or unevenly thick materials. With the EG-2S / EG-2L dual shaft surface slitter rewinders, you can achieve high productivity while effectively managing your budget, making them a wise investment for businesses aiming to maximize their returns and uphold consistent quality standards.

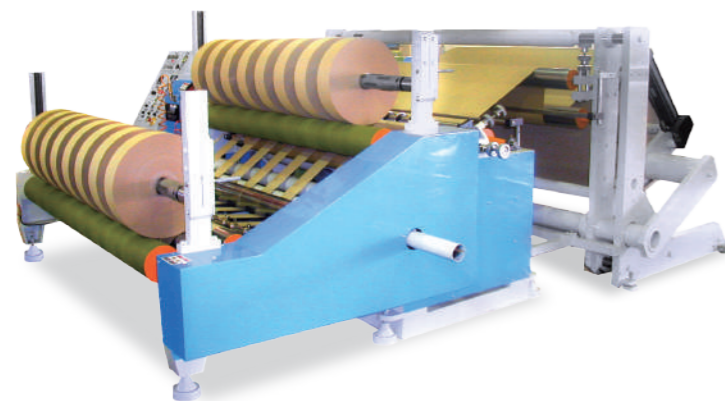

Standard Features

- Shafted unwind stand
- Auto tension control
- Edge guiding system
- Circular shear slitting
- Trim waste air blower
- PLC control system incorporated with HMI touch screen

PAPERS

Optional Features

- Shaftless unwind stand
- Trim suction blower with crusher
- Overhead crane



General Specifications

Roller width	1000 – 2600 mm
Unwind diameter	1200 / 1500 / 1800 mm
Min. slit width	30 mm, and up
Max. rewind diameter	800 / 1000 / 1200 mm
Machine speed	250 M/min

Other specification is offered at request.

