## FILMS & LABELS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.







EG-7003B



EG-7003D

# EG-7003 series

### **Duplex Center Winding Slitter Rewinder**

#### **APPLICATIONS**

- Films, CPE, CPP, APET, PET, PP, PA, PVC, BOPP, PU, LDPE, OPP, HDPE, MDPE, Nylon, TPU
- Plain, embossed PET, Optical PET
- Breathable / Non-breathable PE
- Rigid PVC
- Multi-layered, Aluminum laminates, Hot stamping foil
- Metallized transfer paper
- Separator film
- Copper foil, aluminum foil composite
- Glass epoxy, PCB
- Labelstock, Self-adhesive tapes
- Coated, uncoated papers







## EG-7003 series

#### **DUPLEX CENTER WINDING SLITTER REWINDER**

The EG-7003 series is a dual-shaft center winding slitter rewinder specifically designed for slitting various film-based composite materials. The series is categorized based on rewind sizes, with EG-7003A and EG-7003B featuring a rewind diameter of 450mm, and EG-7003D capable of reaching a rewind diameter of 600mm. These machines are widely used in the flexible packaging industry and offer optional automation, driving control, and unloading methods to meet increased production capacity requirements.

For processing larger diameter materials, the EG-7003A is a cost-effective and flexible option. It is commonly used not only in flexible print packaging but also for optical films and functional thin films.

The EG-7003B series offers the advantage of integrated unwinding and rewinding processes. Besides its extensive application in the packaging industry, it is frequently adapted for slitting circuit board-related materials. The machine's structure can be adjusted to meet customer-specific requirements while ensuring ease of operation.




#### **Standard Features**

- Shear, score or razor slitting
- Trim removal systemAir expansion shafts
- Static eliminator
- Contact pressure roller
- Swing-out rewind shafts
- Auto. tension control
- Manual unloading system
- PLC control system incorporated with HMI touch screen

#### **FILMS & LABELS**

#### **Optional Features**

- Splice device
- Inspection lightbox
- Pneumatic cutters
- Auto. knife positioning
- Motorized finished roll pusher
- Laser-assisted core positioner
- Differential rewind shafts
- Trim waste winder
- Customized solutions for roll handling
- Enhanced fencing & safety implements

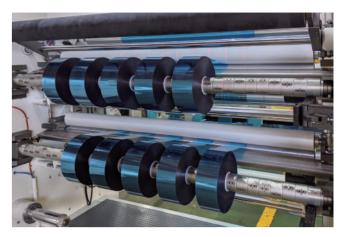

#### **General Specifications**

Roller width	600 – 2200 mm
Unwind diameter	800 – 1200 mm
Min. slit width	50 mm and up
Max. rewind diameter	450 / 600 mm
Machine speed	200 / 300 / 400 M/min

Other specification is offered at request.

