

FILMS & LABELS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.




[Learn More](#)

EG-8002 series

Duplex Center Winding Slitter Rewinder

APPLICATIONS

- Coated, uncoated paper, cardboard
- Tissue paper
- Filter paper
- LLDPE / Nonwoven / Laminations
- PSA , film & paper labelstock
- Liner-less thermal papers
- Pharmaceutical materials
- Aluminum lamination

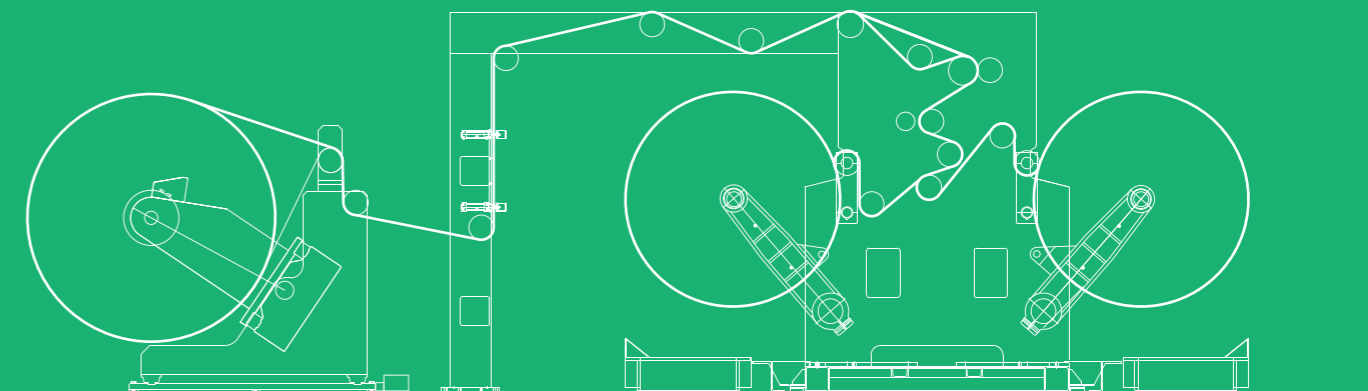

NICELY

sales@nicely.com.tw / [+886-3-3249020](tel:+886-3-3249020) / www.nicely-slitter.com

NICELY MACHINERY DEVELOPMENT CO., LTD



EG-8002 series

DUPLEX CENTER WINDING SLITTER REWINDER

EG-8002, the upgraded version of the EG-300 series machine, combines the benefits of its center-surface design while expanding its specifications to accommodate rewind diameters of up to 1200mm. EG-8002 offers enhanced capabilities for larger-scale operations. Notably, this machine features winding shafts that load directly onto motorized unloading carts. As the carts move away, the finished reels are effortlessly extracted from the shafts, streamlining the unloading process. This innovative design promotes efficiency and convenience, allowing for seamless handling of finished reels.



Standard Features

- Shaftless unwind stand
- Shear or razor cutters
- Trim removal system
- Spreader roller
- Manual unloading trolley
- PLC control system incorporated with HMI touch screen

FILMS & LABELS

Optional Features

- Splice device
- Inspection lightbox
- Motorized web threading
- Pneumatic cutters
- Auto. knife positioning
- Differential rewind shaft
- Dust remover
- Motorized unloading system
- Trim waste winder
- Enhanced fencing & safety implements



General Specifications

Roller width	1200 – 2600 mm
Unwind diameter	1200 mm, and up
Min. slit width	50 mm, and up
Max. rewind diameter	1200 mm
Machine speed	400 / 600 / 800 M/min
Other specification is offered at request.	

