


FILMS & LABELS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.



[Learn More](#)

NICELY


sales@nicely.com.tw / +886-3-3249020 / www.nicely-slitter.com

EG-8003 series

Primary Slitter Rewinder

APPLICATIONS

- Films, BOPP, BOPET, BOPA, PE, PET, PS, PP, PVC, CPP, CPE, OPP (Plain / Metalized / Shrinkable / Rigid)
- LDPE / Nonwoven / Laminations
- Acrylic adhesive

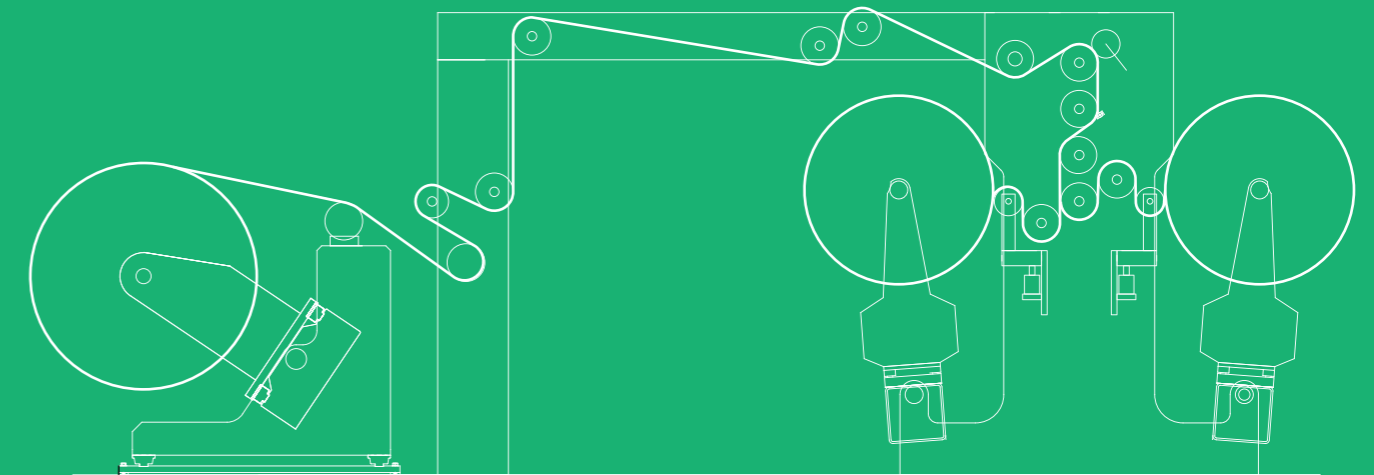

NICELY MACHINERY DEVELOPMENT CO., LTD



EG-8003 series

PRIMARY SLITTER REWINDER

The EG-8003 series primary/secondary slitter rewinder is a highly versatile solution catering specifically to films used in flexible packaging and optical film applications. With its automated features and innovative control systems, this series offers exceptional performance. The motorized web threading, driven spreader rolls, and customizable advanced controller greatly enhance operational efficiency and flexibility. The inclusion of automatic knife positioning and rewind arm positioning further reduces downtime, ensuring smooth and swift operations.

In addition to our new primary slitter, Nicely Machinery is renowned for its expertise in retrofitting other-brand primary slitters. This retrofitting service provides customers with the opportunity to increase productivity and efficiency while making a reasonable investment.



Standard Features

- Shaftless unwind stand
- Shear or razor cutters
- Individual winder
- Trim waste winder
- Manual unloading cart
- Spreader roller
- PLC control system incorporated with HMI touch screen

FILMS & LABELS

Optional Features

- Splice device
- Inspection lightbox
- Motorized web threading
- Auto. knife positioning
- Dust remover
- Auto. winder positioning
- Motorized unloading system
- Electrical actuator system
- Enhanced fencing & safety implements



General Specifications

Roller width	1500 – 7800 mm
Unwind diameter	1000 / 1500 mm
Min. slit width	300 mm and up
Max. rewind diameter	1200 mm
Machine speed	400 / 600 / 800 M/min

Other specification is offered at request.

