

INSULATION MATERIALS

At Nicely, we prioritize delivering exceptional service to support our clients' success. Our dedicated technical team establishes direct connections with customers, providing comprehensive training and expert guidance to empower them in maximizing production capabilities.

With our on-site service team and flexible remote support, Nicely is always ready to provide prompt, professional, and reliable assistance to resolve any operational issues, minimizing downtime.

At Nicely, we recognize the importance of uptime and efficiency for customers. That's why we continuously strive for excellence through innovation and improvement. Choose Nicely, Experience unparalleled customer support that drives your success forward.



[Learn More](#)

NICELY


sales@nicely.com.tw / [+886-3-3249020](tel:+886-3-3249020) / www.nicely-slitter.com

EG-300 series

Multi-Purpose Slitter Rewinder

APPLICATIONS

- Films, PC, PE, PET, PP, PU, LDPE, HDPE, MDPE
- Plain, embossed PET
- Coated, uncoated papers & board
- Copper foil, aluminum foil
- Aluminum laminates
- Pressboard
- Mica tape for wire & cable
- Cover tape, carrier Tape

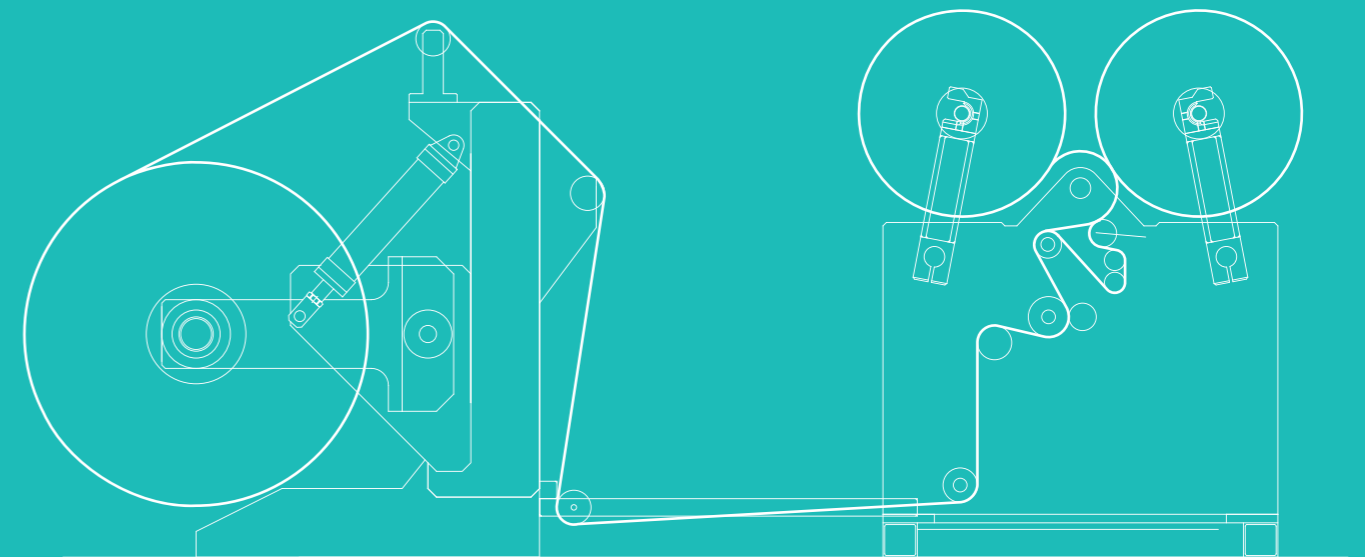

NICELY MACHINERY DEVELOPMENT CO., LTD



EG-300 series

MULTI-PURPOSE SLITTER REWINDER

The EG-300 series is a versatile machine that offers both center winding and surface winding capabilities, allowing it to handle a wide range of materials. One of the key features of the EG-300 series is its ability to process substrates of various widths and thicknesses. It can accommodate slit widths as narrow as 4mm and rewind diameters of up to 800mm.

Additionally, the EG-300 series is designed with a shortened web path, enabling immediate winding. This design ensures tighter and more secure winding by maintaining direct contact with the surface of the rewinding shaft. As a result, it minimizes material movement, reduces variations in roll hardness, and prevents loose winding, ultimately leading to superior roll integrity.




Standard Features

- Shear, score, or razor slitting
- Trim removal system
- Swing-out rewind shafts
- Auto. tension control
- PLC control system incorporated with HMI touch screen

INSULATION MATERIALS

Optional Features

- Splice device
- Cassette type slitting unit
- Differential rewind shafts
- Trim waste winder
- Enhanced fencing & safety implements

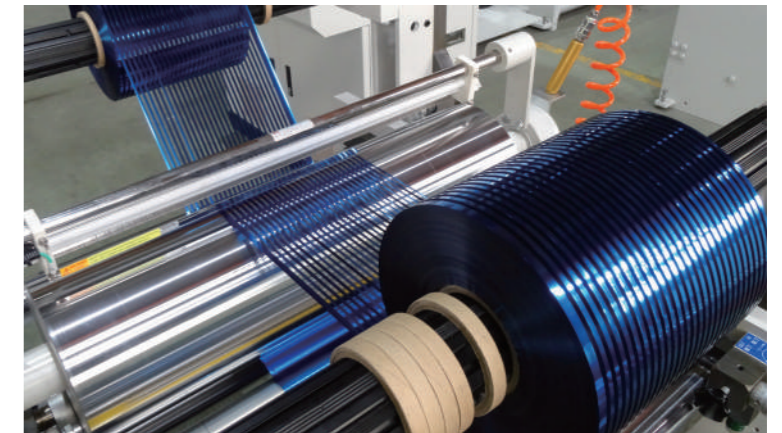

General Specifications

Roller width	600 – 1600 mm
Unwind diameter	600 – 1200 mm
Min. slit width	4 mm and up
Max. rewind diameter	450 / 600 / 800 mm
Machine speed	200 / 300 / 400 M/min
Other specification is offered at request.	

